

SC 811W

Recommended Application:


Highway

Optional Application:

Regional

Trailer Axle

Medium and Long Distances

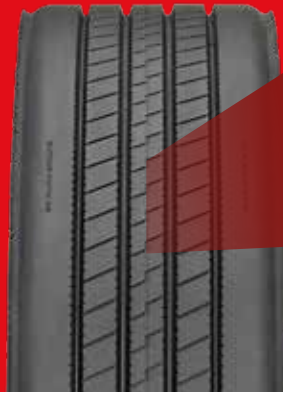

CHARACTERISTICS

Tread with side wings and rounded shoulders to minimize the effect of side drag in maneuvering.

TECHNICAL DATA

N#	Width		Tread Depth		Recommended Tire	Size	Lenght (mm)
	mm	In	mm	In			
7.5	200	7 7/8	12	15/32	9.00R20	P	3.120
7.5	200	7 7/8	12	15/32	10.00R20	M	3.200
8.5	220	8 5/8	12	15/32	275/80R22.5	P	3.120
8.5	220	8 5/8	12	15/32	295/80R22.5 11R22.5	M	3.200
9	230	9	12	15/32	275/80R22.5	P	3.120
9	230	9	12	15/32	295/80R22.5 11R22.5	M	3.200
9.5	240	9 4/8	12	15/32	295/80R22.5	M	3.200
10	250	9 7/8	12	15/32	295/80R22.5	M	3.200
10.5	260	10 2/8	12	15/32	295/80R22.5	M	3.200

*Check the availability of products with special measurements

PRECURED TREADS - SILVERCAP

SILVERCAP.NET

